


# THETFORD

**BUILD IN APPLIANCES  
LINEAR BOWL**

**Models:**

**S~BL1700, S~BL1715, S~BL1725**

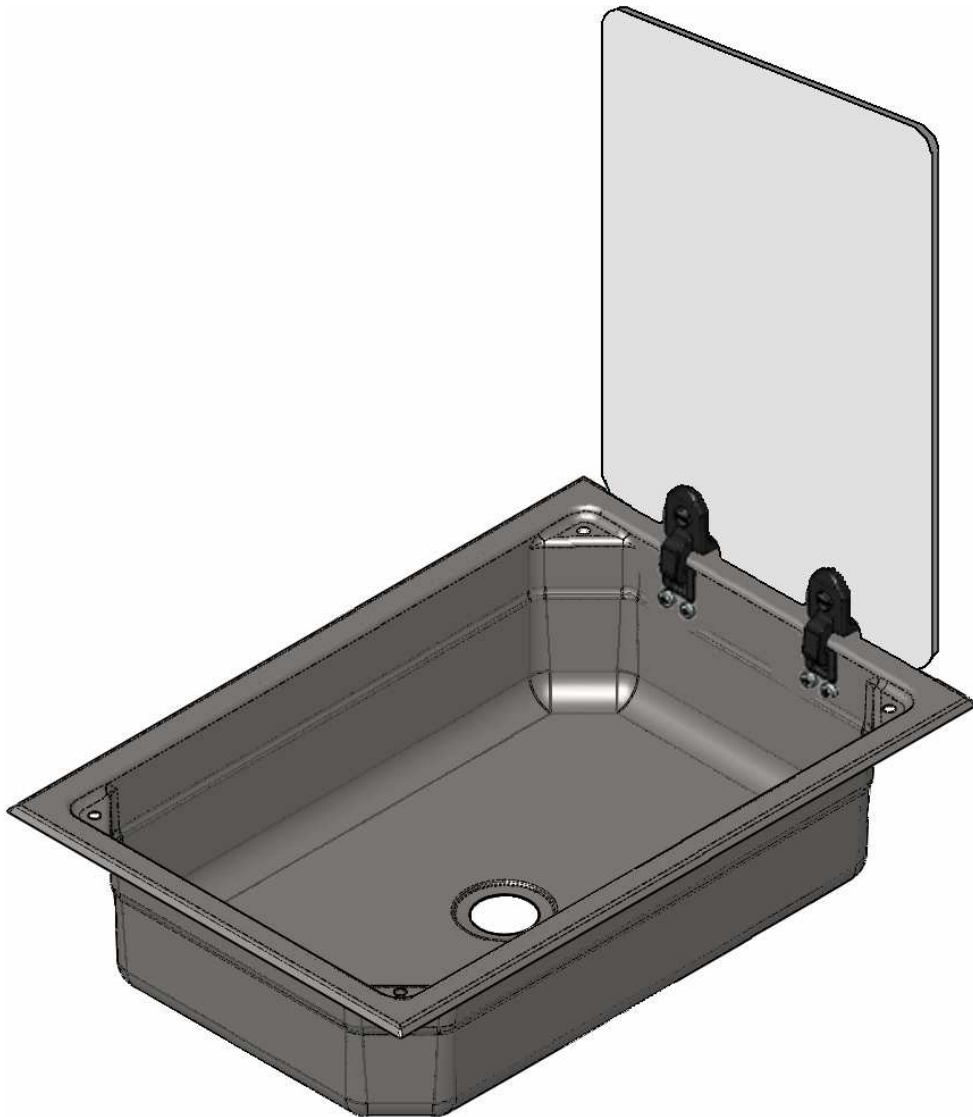

**THETFORD LIMITED,  
UNIT 19 OAKHAM DRIVE,  
PARKWOOD INDUSTRIAL ESTATE.  
SHEFFIELD S3 9QX, ENGLAND.**

**TEL: + 44 (0) 114 273 8157    FAX: + 44 (0) 114 275 3094**

## INSTALLATION INSTRUCTIONS

Flush fitting Stainless Steel bowl available with or without hinged glass lid, overall dimensions, 550mm x 360mm x 130mm Deep.

Decide on the location of the bowl taking into account the services required, and prepare the worktop for installation, see Figs. 2, 3 & 4. Please note that bowls fitted with a glass lid require an additional cutout to provide clearance for the glass lid hinges.




### IMPORTANT


To prevent the ingress of water the bowl is supplied with a peripheral seal, bonded to the underside of the trim. Care should be taken when handling the bowl not to damage this seal.

Located at each corner of the bowl are holes for the fixing clamps – see Fig. 1. Supplied fitted into the 4 clamping bushes are the glass lid bump stops. These should be removed to gain access to the clamping screws. Prior to locating the bowl in the aperture, ensure the 4 clamping arms are rotated against the side of the bowl. Place the bowl into the prepared aperture in the worktop, ensure that the seal is seated correctly, and if fitted, open the glass lid. The bowl may now be fixed in position by tightening the 4 clamping screws (recommended torque of 1 Nm) until the bowl is firmly fixed to the worktop and the seal is compressed sufficiently to prevent the ingress of liquids. Finally replace the glass lid bump stops into the 4 clamping bushes.

Fig. 1 – Fixing Clamp

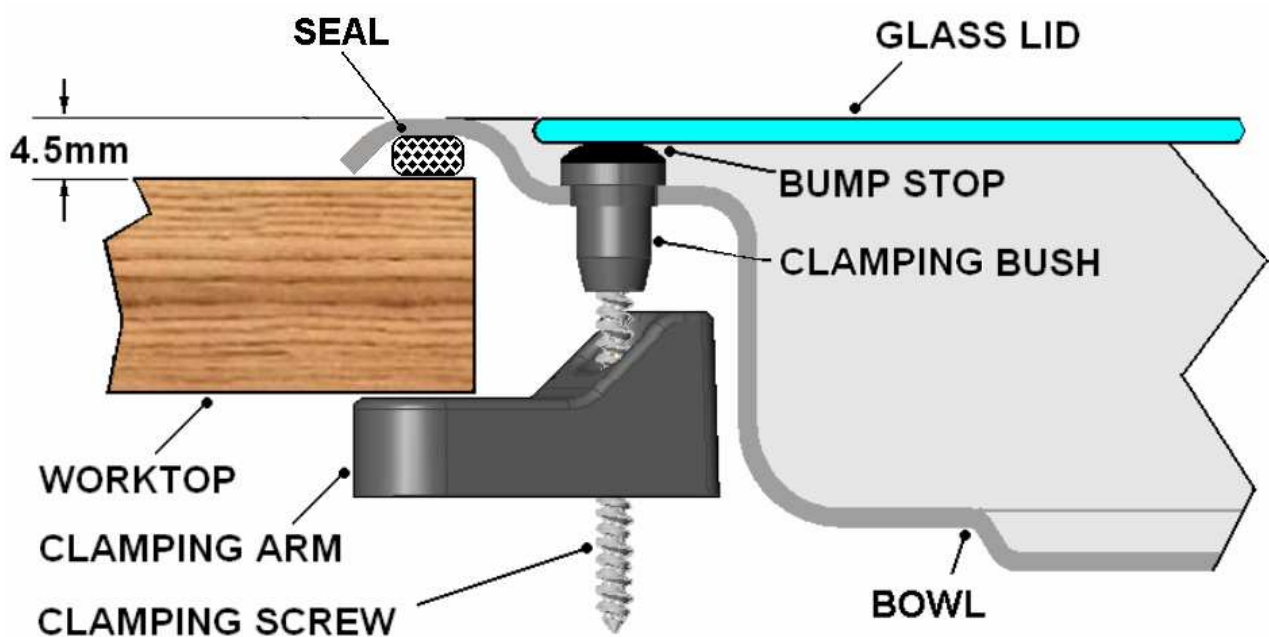

**Fig. 2 – Model S~BL1700 Bowl only.**

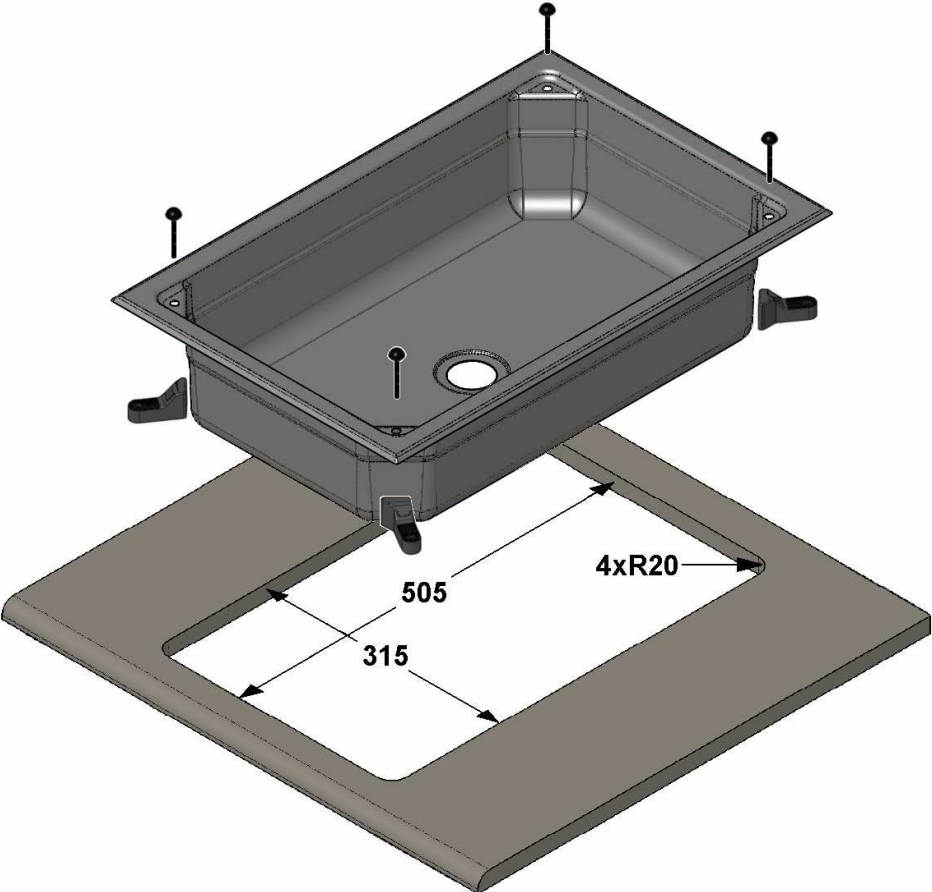

**Fig. 3 – Model S~BL1715 Bowl with rear hinge lid.**

